

AuxSet2 User's Guide

Document Part # 65177R1


Thank you for purchasing our product!

We hope this Kennedy Technology Group product gives you many hours of clear and reliable operation.

This product was designed to connect a variety of Audio Alert Devices (e.g. GPS, Radar Detector) to a variety of bike auxiliary audio inputs. It must be used in conjunction with a KTG Device Harness and a KTG Auxiliary Audio Harness. Although it is a passive device and requires no power, a KTG Power Harness may be required to deliver power to the KTG Device harness. Each KTG Harness is sold and packaged separately.

To begin its installation, connect **AuxSet2** connector P1 to the Auxiliary Audio Harness

Next connect **AuxSet2** connector P2 to the Device Harness you purchased.

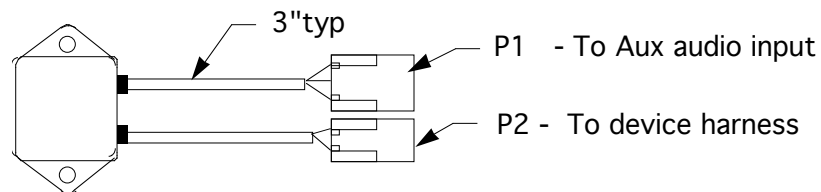

Refer now to the instructions sheets provided with the Auxiliary, Power and Device Harness. When you complete those installation instructions, refer back to this sheet.

TURN ON YOUR BIKE'S AUDIO SYSTEM AND SELECT "AUX" INPUT.

Kennedy Technology Group, Inc.
614 Ridgeway
Rose Hill, Kansas 67133 - USA
voice 316.776.1111 • fax 316.776.9035
email:kennedy@cellset.com