



Power Harness Install Guide

Connect the Power Harness, jack, J1 to the KTG Device or Device Harness.

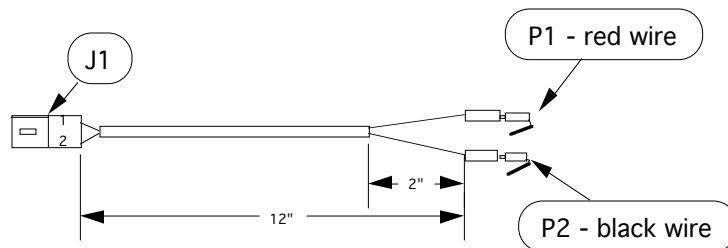

Remove the two black plugs installed on the cigarette lighter socket and install P1 and P2 in their place. Install P1 so the free tab is facing upward. Replace the two plugs previously removed.

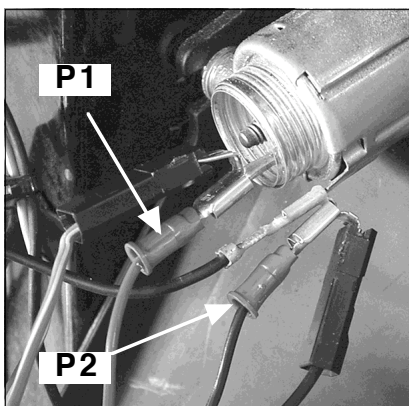

Kennedy Technology Group, Inc.
614 Ridgeway • Rose Hill, Kansas 67133 - USA
voice 316.776.1111 • fax 316.776.9035
email:kennedy@cellset.com