


PowerSet Install Guide

Document part number 65274R0

Thank you for purchasing our product!

PowerSet must be used in conjunction with a KTG Power Harness (sold and packaged separately). The KTG Power Harness must be connected to a switched (on/off with ignition key) power source. Refer to and perform the harness installation.

Connect the KTG Power Harness, jack, to the KTG **PowerSet's** mating connector, P1.

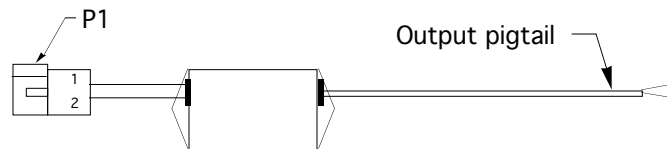

Splice the output pigtail, red wire to the device connector's positive terminal. Splice the pigtail black wire to the device connector's negative terminal.

Note: this device is internally fused with a 1 Amp solid state device. No serviceable parts are inside the sealed unit. To reset the fuse, turn off the bike power for approximately 1 minute.

Kennedy Technology Group, Inc.
614 Ridgeway • Rose Hill, Kansas 67133 - USA
voice 316.776.1111 • fax 316.776.9035
email:kennedy@cellset.com