

# User Sheet - NavTimer


Document part number 65449R0

[www.cellset.com](http://www.cellset.com)

Remove the 1800's seat and locate the GPS power connectors located in the black boot between the relay panel and the cross-bar.



Disconnect the connector set (as shown in the photo, above) and reconnect them to the mating connectors of the NavTimer, J1 and P1.

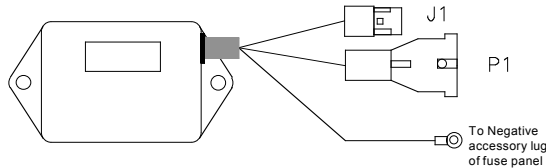

Attach NavTimer's ground lug connector to the "-" accessory lug connector located at the bike's fuse panel.

Operation: When the bike is turned on, NavTimer supplies power to the GPS. When the bike is turned off, NavTimer continues to supply power for a period of 90 minutes. After that, power is removed from the GPS.


If you do not want NavTimer to supply power after you turn the bike off, then you need to turn the bike ON and then - within 3 seconds - turn the bike OFF.

# User Sheet - NavTimer


Document part number 65449R0

[www.cellset.com](http://www.cellset.com)

Remove the 1800's seat and locate the GPS power connectors located in the black boot between the relay panel and the cross-bar.

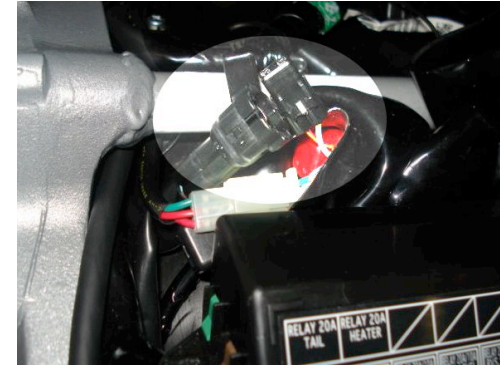

Disconnect the connector set (as shown in the photo, above) and reconnect them to the mating connectors of the NavTimer, J1 and P1.

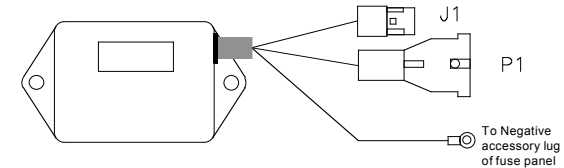

Attach NavTimer's ground lug connector to the "-" accessory lug connector located at the bike's fuse panel.

Operation: When the bike is turned on, NavTimer supplies power to the GPS. When the bike is turned off, NavTimer continues to supply power for a period of 90 minutes. After that, power is removed from the GPS.

If you do not want NavTimer to supply power after you turn the bike off, then you need to turn the bike ON and then - within 3 seconds - turn the bike OFF.