



A B C D E F G H J K L M N P

1  
2  
3  
4  
5  
6  
7  
8  
9

Rev	Description	by	Date
0	Release	jj	10/21/05

Pin	wire	circuit
1	orange	tip
2	yellow	ring
3	red	+12V
4	blk/shld	gnd

25					
24					
23	90132	0	24	in	wire, 22 ga, red, 300V, stranded
22	90130	0	24	in	wire, 22 ga, blk, 300V, stranded
21	75036	0	1	ea	Holder, Fuse, 3AG
20	75006	0	1	ea	Fuse, 2A, 3AG
19	70007	0	1	ea	Bag, Poly, 5"x14"
18	65167	1	1	ea	Usersheet, Device Harness
17	60137	0	1	ea	Label, device harness, iWay
16	----	-	-	-	-----
15	60049	0	1	ea	label, overlaminating, 1.25 x 3
14	60004	5	1	ea	Label, KTG package label
13	40190	0	1	ea	Cordset, Lowrance, iWay
12	40152	0	2	ea	Terminal, Male, Micro-fit, gold, 26-30 AWG
11	40119	0	1	ea	Terminal, Male, Micro-fit, gold, 20-24 AWG
10	40116	0	1	ea	Plug, Micro-fit, 3 circuit
9	40025	0	2	ea	Contact, pin, 18-24AWG, 0.062"
8	40015	0	1	ea	plug, 2 conductor
7	30502	0	1	ea	Tie wrap, 4", Black
6	30200	0	0.2	mL	Adhesive
5	30029	0	1.5	in	Tubing, heat shrink, 3/8
4	30070	0	50	in	Sleeve, polyester, 1/4", black, non-fray
3	30057	0	1	in	Tubing, heat shrink, 3/16
2	30049	0	1	in	Tubing, heat shrink, 1/16
1	30037	0	1	in	Tubing, heat shrink, 3/32, black
Item	Part#	Rev	Qty	Unit	Description

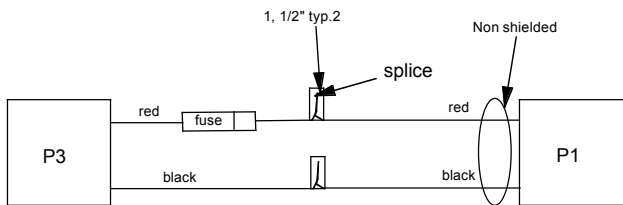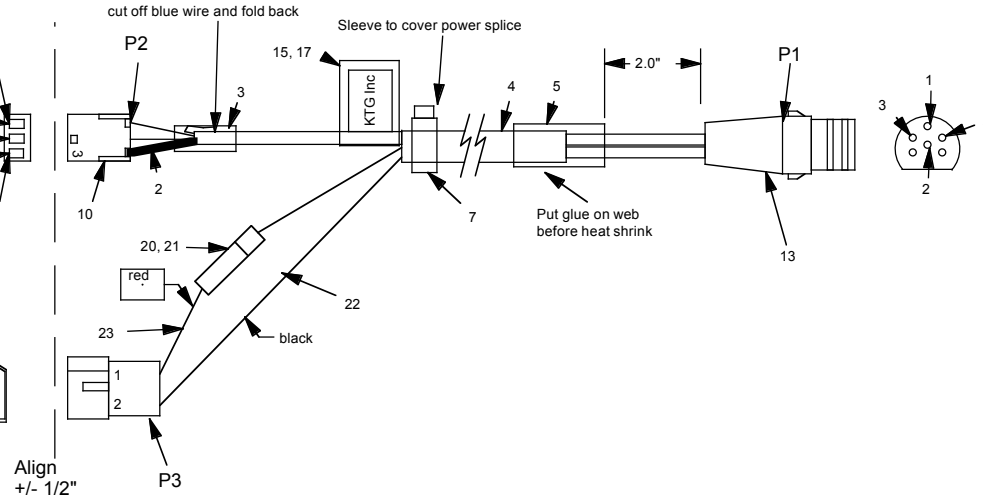

THIS DRAWING IS THE PROPERTY OF THE KENNEDY TECHNOLOGY GROUP, ROSE HILL, KANSAS

## Kennedy Technology

REFERENCE: **95209**      **Harness, iWay**

SIZE: B    CADFILE:    DWG NO. **95374**    REV NO. **0**    EFFECTIVE: **sn:**

SCALE: NONE      FOR ASSISTANCE CONTACT: **vox 316-776-1111**  
**fax 316-776-9035**

SHEET 1 OF 1

UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN INCHES  
TOLERANCES:  
LINEAR:  
Fractional - 1/32"  
0.0 ± 0.15  
0.00 ± 0.015  
0.000 ± 0.0015  
ANGULAR  
±0.5 DEG.

A B C D E F G H J K L M N P